

Catalog #:	
Project :	
Type :	Date:
Notes:	

LED Transparent Panel Light


TL-TPL1™ SERIES

DESCRIPTION

Sophisticated Transparent Panel Light delivers 55% Up Light and 45% Downlight. Aluminum body & Etched glass diffuser. 0-10V Dimmable to create the perfect light setting. 100% Mercury & Lead Free.

APPLICATIONS

Ideal for lighting offices, schools, hospitality, healthcare & other industrial applications. Easy to install and improved aesthetics.

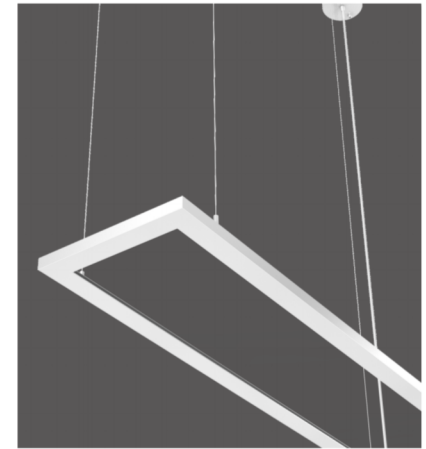

QUICK SHIP:

PL00-36DS286-S403Y-40
PL00-36DS286-S403Y-50

Specification Features



Controls / Dimming

High quality isolated driver; 0-10V dimming; Flicker free.

Warranty

5 Years Limited Warranty. See warranty documentation for more information.

Certification

It complies with UL & cUL certification, DLC Standard Listed. IP20 Rated.

Installation / Mounting

Luminaire ideal for Cable Mount install and kit is included. Beam angle is 360°. Instant start w/NO humming.

Ordering Information

Example: PL00-36DS286-S403Y-50


PL00-36DS286	S403Y	14	50	[BLANK]
Series	Nominal Wattage	Size	Color Temp	Voltage
PL00-36DS286-S403Y Transparent Up & Down Light	S403Y 40 Watt	[Blank] 14 1 x 4	40 4000K 50 5000K	[Blank] 100-277V
[BLANK]				
Controls/Mounting/Options				
		CMK	Cable Mount Kit	



Lighting Parameters



Input Voltage	AC100-277V
CCT	4000K / 5000K
CRI	Ra>80
Luminous efficacy	100lm/w
PF	0.90
Driver Efficiency	87%
THD	15%
Working temperature	-4°F~104°F
Storage temperature	-22°F~130°F
IP Rating	IP20 Rated

Product Dimension

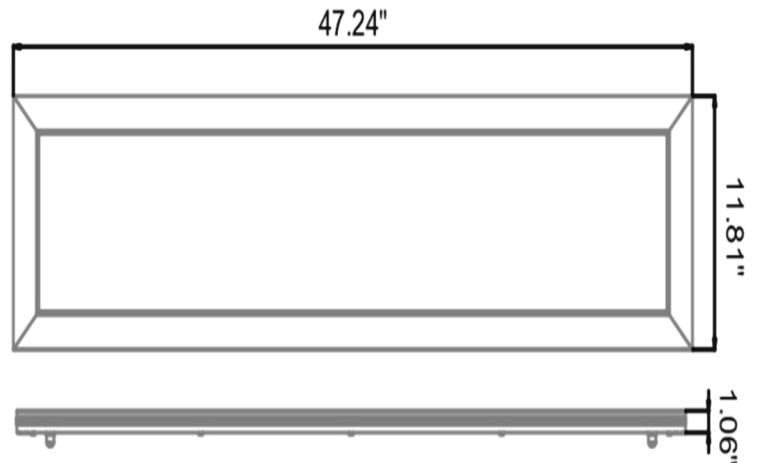

Part Number	L	W	H
TL-TPL1	47.2"	11.8"	1.06"

Photometric data

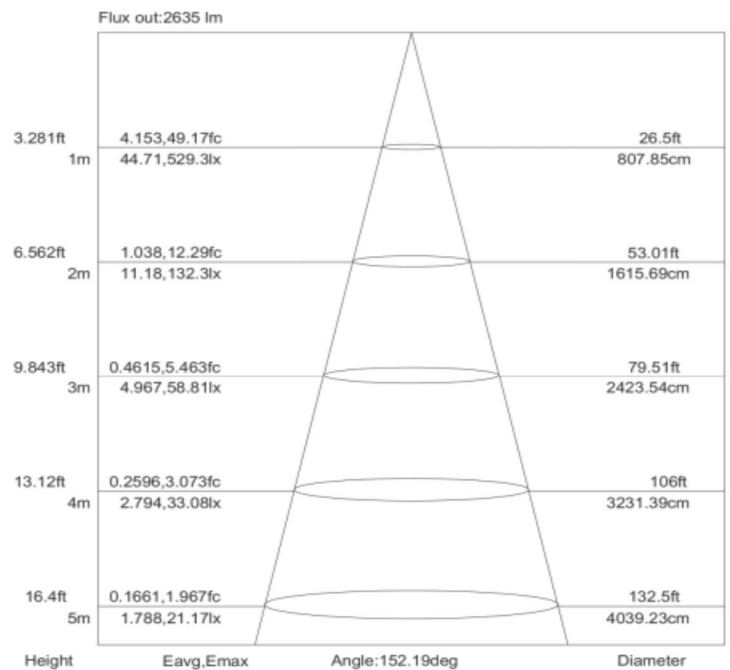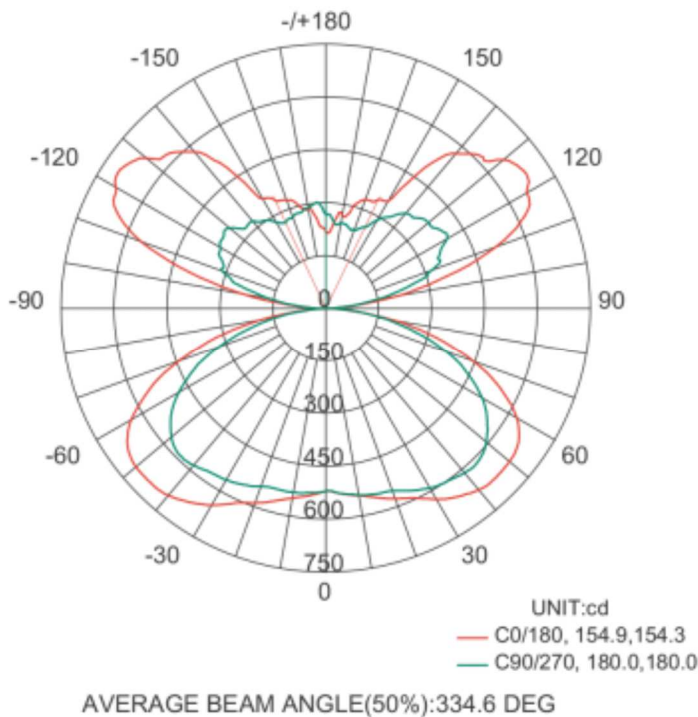

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Product Information

Model	Description	Watt	Lumens	Voltage	THD	PF	DLC Product ID
PL00-36DS286-S403Y-40	LED Up Down Glass Panel	40	4,200	100-277	≤15%	>0.9	P6WT843D
PL00-36DS286-S403Y-50	LED Up Down Glass Panel	40	4,200	100-277	≤15%	>0.9	PQBCEMVK

