

<b>Catalog #:</b>	
Project :	
Type :	Date:
Notes:	

## TK E-1 LED Low Profile Thermoplastic Emergency Lights

EM SERIES

### DESCRIPTION

Adjustable long lasting, efficient, ultra bright white LED lamp heads.

One, 0.5W white LED per lamp head.

Unique all-inclusive lamp, reflector and lens assembly.

### APPLICATIONS

Ideal for lighting offices, schools, hospitality, healthcare & other industrial applications. Easy to install, Snap-on lens, and improved aesthetics.



### ELECTRICAL

Dual 120/277 voltage standard.

Optional dual 120/230 voltage available.

Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).

3.6V long life, maintenance-free, rechargeable Ni-Cd battery.

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination



## Specification Features

### Housing

Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish

### Installation /Mounting

Surface mount back plate fits most standard size junction boxes and snaps into place. Suitable for wall or ceiling mount

### Options

**SPV:** UL Listed for special voltage option.

**HL:** Provides increased center-to-center spacing (2.0W per head).


### Warranty

One year warranty on all electronics and housing.

UL Listed for damp locations (0°C – 30°C).

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### Dimensions:

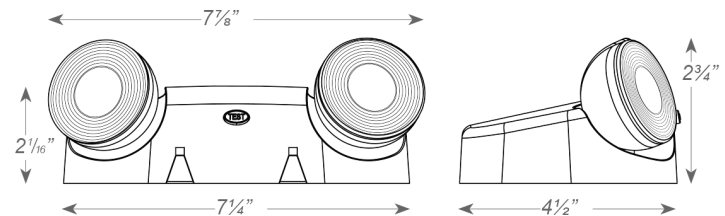

MODEL	HOUSING COLOR	OPTIONS
TK-E-1	W White B Black A Aluminum	RC Remote Capacity 1 SPV 120/230 Volt 50/60Hz HL High Lumen LED

### NOTES:

1= HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option