

Catalog:	
Project:	
Type:	Date:
Notes:	

LED Wall Pack

TK-WP01™ Series

Description

TekTron's LED Wall Pack series comes with glass refractor and PC cover. LED wall pack delivers 130Lm/W lumens at 3CCT Tunable that is 3000K/4000K/5000K at 120W.


Applications

This is an ideal commercial out door fixture for buildings, and easily replace to any wall packs light, no matter full cut-off wall packs or semi cut-off wall packs.



Quick Ship

TK-WP01-072DUV(30K-40K-50K)
TK-WP01-096DUV(30K-40K-50K)
TK-WP01-120DUV(30K-40K-50K)

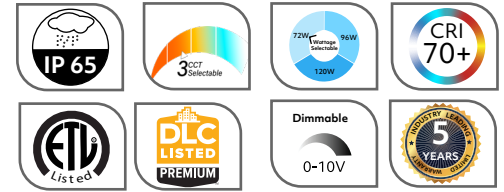

Specification Features

Controls / Dimming

0-10V dimming, 3 color tunable, 3 Wattage Tunable Available in photocell and motion sensor options. 50,000 working hours.

Warranty

5 Years Limited Warranty.
For more information visit us at,
www.technoledlights.com/warrantyinfo

Certification

It complies with ETL Listing, DLC Premium, IP65 Rated

Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities.

Ordering Information


Example: TK-WP01-120DUV (30K-40K-50K)

TK	WP01	120	D	UV	30K	Optional
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Brand	Series	Watts	Dimming	Voltage	Color Temp	[Blank]
TK - TekTron	WP01 - Wall Pack 01	120(Watts) (72W/96W/120W) Wattage Changeable	D- Dimming 0-10V	UV- Universal 100-277V	30K - 3000K T - 40K - 4000K 50K - 5000K } CCT Selectable	Glass Diffuser PC Diffuser

Specification Features

Input Voltage	120-277 VA
Color Temperature (CCT)	3000K/4000K/5000K
Luminous efficacy (Lm/W)	130 Lm/W
Color Rendering Index (CRI)	Ra>70
Dimmable	0-10V
Power Factor	>0.90
Operating Temperature	-25°C ~ 50°C
Life Span	50,000+ Hrs

Product Dimension

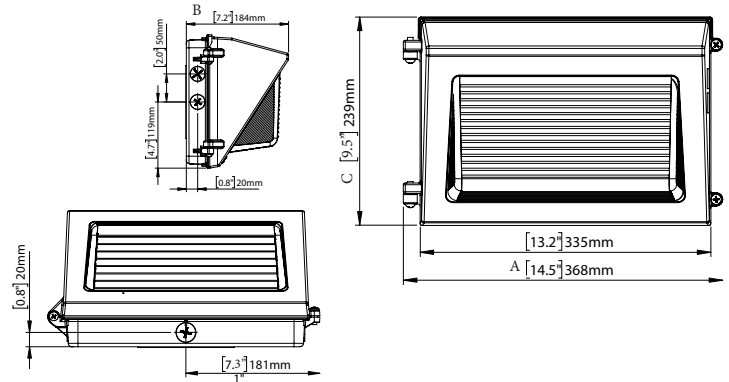

Part Number	A (Length)	B (Width)	C (Height)
TK-WP01	14.5"	7.2"	9.5"

Infographic

