

Catalog:	
Project:	
Type:	Date:
Notes:	

LED SLIM WALL PACK

TK-WP06™ Series

Description

TekTron's TK-WP06 series are the perfect choice for outdoor lighting applications. They have a high efficacy of up to 125 lm/W and a variety of options to meet different requirements, such as wattage switchable, 3 CCT selectable.



Applications

Ideal for outdoor & wet location applications: Entry ways, walkways, restrooms, storage units, stairwell, parking lots, & patios.

Quick Ship

TK-WP06-30W-X-YY TK-WP06-40W-X-YY
TK-WP06-60W-X-YY TK-WP06-80W-X-YY
TK-WP06-100W-X-YY TK-WP06-120W-X-YY



Specification Features

Controls / Dimming

1-10V Dimming. Premium 2835 LED chips, 3CCT Selectable, Wattage Switchable. IK08 borosilicate prismatic glass with die-cast aluminum housing.

Certification

It complies with IP65 Rated. (UL, cUL, DLC 5.1 Premium pending).

Warranty

5 Years Limited Warranty. For more details on the warranty, please visit.

www.technoledlights.com/warrantyinfo

Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities detachable mounting plate fits most standard junction boxes or can be surface mounted and wired via conduit entries.

Ordering Information


Example: TK-WP06-30W-X-YY

TK	WP06	30W	YY	[BLANK]	Optional
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Brand	Series	Watts (Wattage Selectable)	Color Temp	Dimmable	[BLANK]
TK - TekTron	WP06 - Wall Pack Gen 6	30W- 10W/20W/30W 40W- 20W/30W/40W 60W- 40W/50W/60W 80W- 50W/60W/80W 30W- 10W/20W/30W 100W- 60W/80W/100W 120W- 80W/100W/120W	30K - 3500K 40K - 4000K } 3CCT Selectable 50K - 5000K 3000K - 6500K (single color temperature optional)	D - 1-10V Dimming Voltage V - 120-277VAC 120-347VAC	Photocell Motion Sensor 8W Emergency Driver Finishes Black Bronze Customized

Specification Features


Input Voltage	120 - 277VAC / 120 - 347VAC
Color Temperature (CCT)	3000K, 4000K, 5000K
Luminous efficacy (Lm/W)	125 Lm/W
Color Rendering Index (CRI)	Ra>70
Dimmable	1-10V
Lens	Tempered Glass
Operating Temperature	30W - 100W - 40°C ~ 50°C 120W - 40°C ~ 50°C
Life Span	50,000+ Hrs

Dimensions

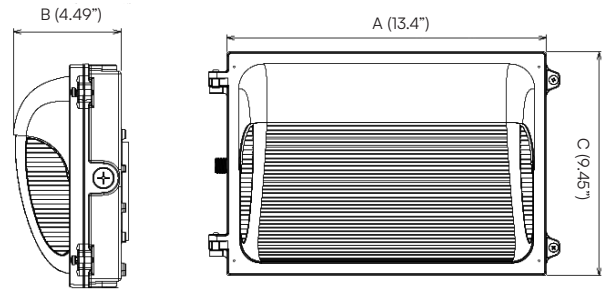

Part Number	A (Length)	B (Width)	C (Height)
TK-WP06-XXW	13.4 Inches	4.49 Inches	9.45 Inches

Lighting Coverage

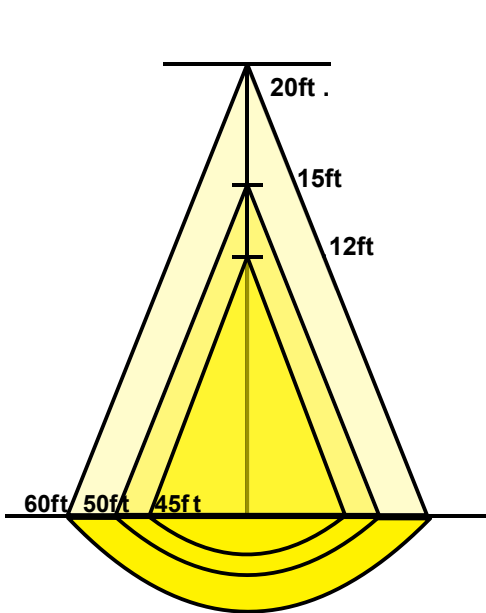

Accessories

