

Catalog:	
Project:	
Type:	Date:
Notes:	

COMBO EMERGENCY EXIT LIGHT

TK-EE-7082™ Series

Description

Tektron's EE-7082 The universal field-selectable single-/double-face emergency light features two fully adjustable lamp heads with a 2 X 1.2W capacity. It is suitable for use in damp locations and complies with UL 924 and CEC Title 20 standards.



Applications

This Luminaries is suitable for using in Wet location, on Malls/Retail Spaces, Hotels, Hospitals, residential.

Quick Ship
TK-EE-7082RX



Specification Features

Controls / Dimming

The emergency exit sign is constructed with an injection-molded thermoplastic ABS housing and features fully illuminated 6" characters. It is equipped with a maintenance-free 3.6V NiCad battery for reliable operation.

Certifications

It complies with UL listings.

Warranty

5 Years Limited Warranty.
For more information visit us at,
www.technoledlights.com/warrantyinfo

Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities. Wall and ceiling

Ordering Information


Example: TK-EE-7082RX-W-RC

TK	EE-7082	R	W	RC	[Blank]
Brand	Series	Letter Color	Finish	Options	Voltages
TK - TekTron	EE-7082R - Emergency Exit 7082R Series	R - Red G - Green	W - White	RC - Remote Capacity	120/277 VAC Double Face

Specification Features

Input Voltage	120/277VAC 60Hz
Input Rating	1.2W, 100MA
Operating Temperature	0°C to 40°C (32°F to 104°F)
Illumination	12PCS 0.2W SMD LED total 2.4W
Battery	3.6V NiCad battery

Dimensions

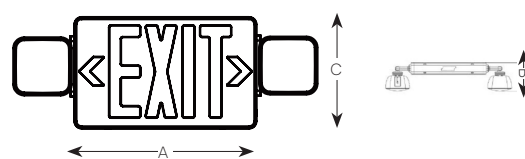

Part Number	A (Length)	B (Width)	C (Height)
TK-EE-7082	19.68 inches	7.26 inches	4.26 inches

