

Catalog:	
Project:	
Type:	Date:
Notes:	

## LED Strip Fixture

## TK-LBS3™ Series

### Description

TekTron's TK-LBS3 is a functional and multi-purpose LED Strip light fixture that is tunable for watt and color temperature. It features premium performance and construction durability.


### Applications

This fixture is widely used at warehouses, garages, stairwells, storage areas, and damp or harsh environments



#### Quick Ship

TK-LBS3-4FT-24WD(35K-40K-50K)-A-T  
TK-LBS3-4FT-32WD(35K-40K-50K)-A-T  
TK-LBS3-4FT-40WD (35K-40K-50K)-A-T



### Specification Features

#### Controls / Dimming

PC Frosted lens, 0-10V dimming Flicker free, Motion Sensor, Emergency Backup, PIR sensor. 50,000 working hours

#### Certification

It complies with ETL Listings, DLC Premium Listings.

#### Warranty

5 Years Limited Warranty.  
For more information visit us at, [www.technoledlights.com/warrantyinfo](http://www.technoledlights.com/warrantyinfo)

#### Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities with the help of an universal mounting plate preinstalled at the bottom. Surface or Suspended mounted are optional.

### Ordering Information


Example: TK-LBS3-4FT-20W-35K-A-T

TK	LBS3	4FT	24W	T	DUV	Optional	Linkable
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>Brand</b>	<b>Series</b>	<b>Length</b>	<b>Watts</b> (Wattage Selectable)	<b>Color Temp</b>	<b>Dimmable</b>	<b>[BLANK]</b>	<b>[BLANK]</b>
TK - TekTron	LBS3 - LED Strip Fixture	4FT - 4 Feet 8FT - 8 Feet	4FT - 20W/32W/40W 8FT - 40W/65W	30K - 3000K T - 40K - 4000K 50K - 5000K } 3 CCT Selectable	D - 0-10V Dimming  Voltage UV - 100-277VAC (Universal Volatage)	MS - Motion Sensor EM - Emergency Driver BM - Bluetooth	Blank - Can't Linkable 2 - 2pcs Link 3- 3pcs Link 4 - 4pcs Link 5 - 5pcs Link 6 - 6pcs Link 7 - 7pcs Link

Specification Features

Input Voltage	100 - 277 VAC
Color Temperature (CCT)	3500K, 4000K, 5000K
Luminous efficacy (Lm/W)	130 Lm/W
Color Rendering Index (CRI)	80+
Dimmable	0-10V
Power Factor (PF)	0.9
Operating Temperature	-15.5°C ~ 50°C
Life Span	50,000+ Hrs

Dimensions

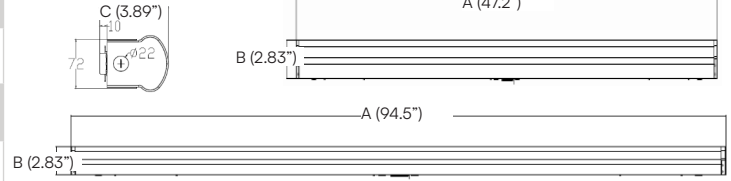

Part Number	A (Length)	B (Width)	C (Height)
TK-LBS3-4FT-XXW	47.2"	2.83"	3.89"
TK-LBS3-4FT-XXW	94.5"	2.83"	3.89"

Product Features



Ceiling Mount




Pendant Mount



Linkable



Wiring Diagram & CCT Wattage Selectable Switch

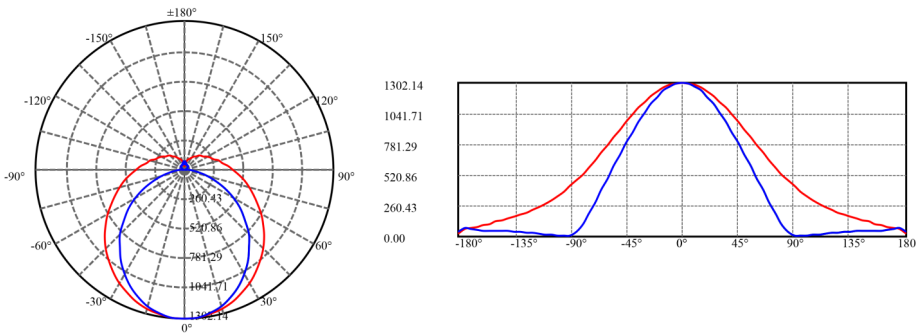

Application Images

